



TriStar®

UNRIVALLED HYDRAULIC PERFORMANCE

- A modern, optimised design **for optimum hydraulic efficiency**
- **Higher delivery rate for lower energy consumption**
- **Proven reliability and durability** thanks to the polypropylene fiberglass reinforced wet end
- **Easy maintenance:** twist-lock cover + extra wide strainer basket for less frequent cleaning
- Recommended for pools **up to 195 m³***

* Calculation based on 6 hours turnover




Easy-to-service design provides simple installation and maintenance




Drain plugs for an easy wintering



See-through strainer cover

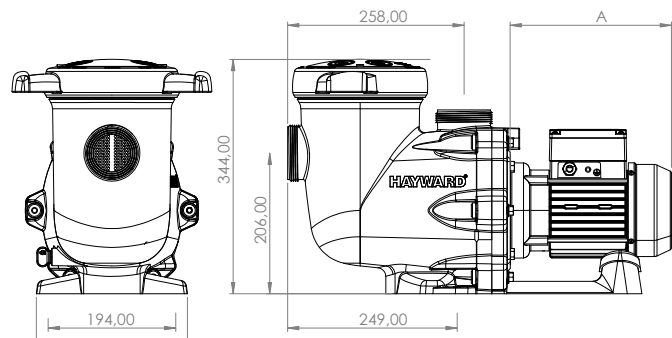

Pressure (mbar)

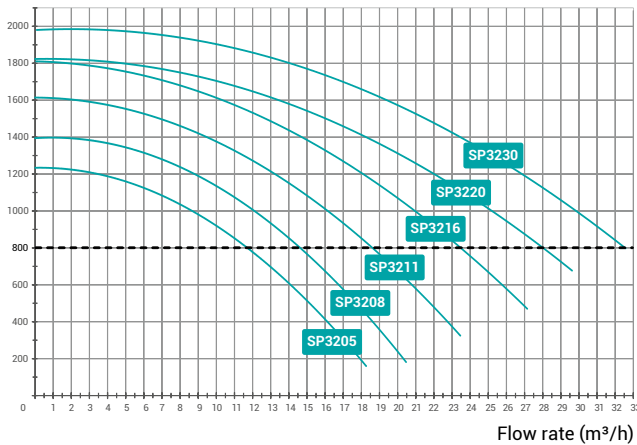

THIS PUMP MODEL EXISTS IN VARIABLE SPEED

Technical Specifications

Max. water temp.	35°C
Mechanical seal	AISI 316, compatible with salt treatment (salt chlorinator)
Motor specifications	Class F, IP55, 50 Hz, 2 Poles
Housing/impeller/strainer/lid	PP+GF/Noryl® + GF/ABS/PC
Prefilter size	4.5 L

	Type HP	Dim A (mm)	Weight (kg)	Fitting** (mm)	Flow rate*	P1 Max (W) (Maximum consumption of the pump)	Nominal power of the motor P2 (W)	Amps at P1 Max (A)	Quantity per pallet	Item
SINGLE PHASE TRISTAR®	1/2	220	14	63	11.4 m³/h	660	430	2.8	10	SP32051
	3/4	220	14	63	14.5 m³/h	800	430	3.4	10	SP32081
	1	247	14	63	18.5 m³/h	1000	720	4.3	10	SP32111
	1.5	247	15	63	23.5 m³/h	1350	790	5	10	SP32161
	2	265	17	63	28 m³/h	1650	1160	7.25	10	SP32201
	3	316	17	63	32.5 m³/h	2100	1680	9	10	SP32301
THREE PHASE TRISTAR®	2	247	15	63	28 m³/h	1600	1100	4/2.3	10	SP32203 IE3 ✓
	3	265	17	63	32.5 m³/h	2000	1500	5.5/3.2	10	SP32303 IE3 ✓

* At 8 m water column pressure

** All bodies have a 2" thread. Possibility of having gluing AINSI connection 2" by buying code SP3200KIT.