HAYWARD

EXPERT LINE

YEARS OF WARRANTY 3 STANDARD + 4 TH

MADE IN EU


RS II VSTD

PACKED FULL OF PERFORMANCE AND TECHNOLOGY

- Smart Inverter + Permanent Magnet Motor + synchronized motor : electricity saving up to 85%*
- **Extremely quiet**
- **Lexan™ transparent lid with wingnut closing system, no tools needed**
- **Union fittings provided**
- Recommended for pools **up to 100 m³****

* Running at low speed.
Electricity savings of 65% are generally achieved.
** Running at low speed 24 hours



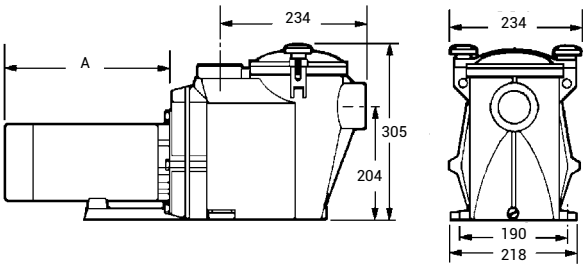




The intuitive control module displays relevant information such as real-time energy consumption. Improved control box, with the addition of five daily programs. "Skimming" function that allows the surface to be automatically skimmed every 1, 2 or 3 hours. **Timer Mode.**

Technical Specifications

Max. water temp.	35°C
Mechanical seal	AISI 304, compatible with salt treatment (salt chlorinator)
Motor-drive specifications	Class F, IP55, 50 Hz, Brushless VFD
Housing/impeller/strainer/lid	PP+GF/Noryl® + GF/ABS/PC
Prefilter size	2.95 L

• 1.5 HP Curve


Pressure (mbar)

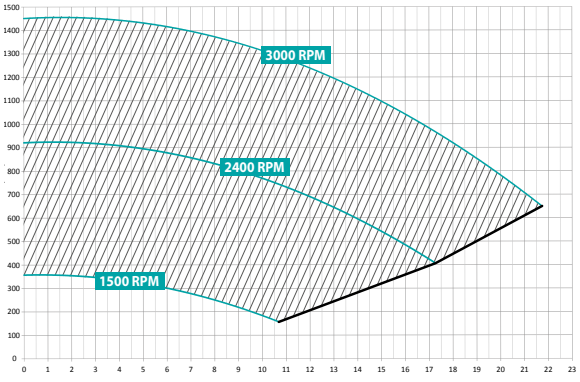

Flow rate (m³/h)

• 2 HP Curve

Pressure (mbar)

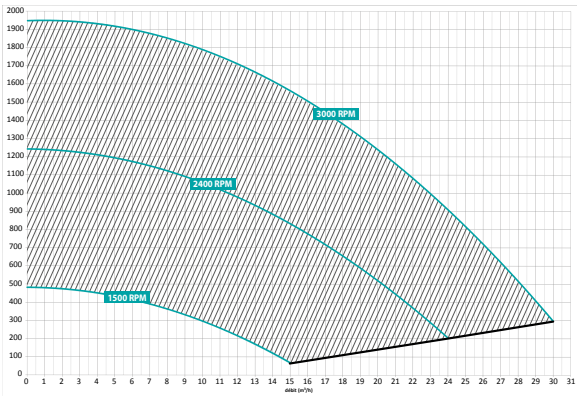

Flow rate (m³/h)

	Speed	Type	Dim A	Weight	Fitting*	Flow rate*	Input Power P1	Output Power P2	Amperage	Quantity per pallet	Item
RS II VSTD	600 - 3000 RPM (20 rpm)	1.5 HP	230 mm	15 kg	63 mm	@10 m: 16.7 m³/h @8 m: 19.7 m³/h	1240 W	1100 W	5.9 A	10	RS3016VSTD
	600 - 3000 RPM (20 rpm)	2 HP	250 mm	16 kg	63 mm	@10 m: 23 m³/h @8 m: 25 m³/h	1500 W	1400 W	7.8 A	10	RS3020VSTD

*at 3000 Rpm